

Locomotive Dual-Filament Halogen Headlight & Ditch/Auxiliary Light

RH-PAR56-75V-HDF

FRA APPROVED


Introducing our latest innovation: a 30% larger halogen-filled inner capsule/envelope. This enhanced design prevents filament breakage during expansion, ensuring an extended lifespan for the bulb.

The PAR56 halogen headlamp and ditch lamp maintains a minimum 200,000 candelas to keep your locomotives in compliance with rule **49 CFR Part 229.125** regulations as outlined by the Federal Railroad Administration (FRA). Lamps are fit to the current incandescent industry standard.

Specifications:

Primary Application	Train, Locomotive
Operating Voltage	75V
Rated Life	Up to 4,000 hours
Color Temperature	3000K
Power Consumption	350W
C.P.	200,000 cd
Operating Temp	-40 to +1000 F
Base	Screw Terminal
Size	L:4.5" x D:7"

***Comes in 18 pack**

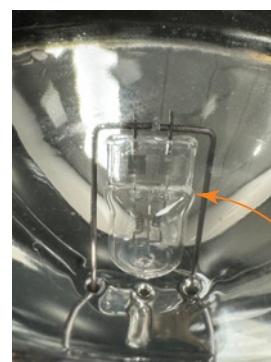

30% larger



Railhead
CORPORATION

Railhead Corp.
224 Shore Court, Burr Ridge, IL 60527
800-235-1782 708-844-5500
www.railheadcorp.com